




# HUE-DMX System Setup



## Initial Setup

- Connect HUE-DMX-CONTROLLER, HUE-DMX-DECODER(s), Power Supplies and LED Ribbon in accordance with the wiring diagram.

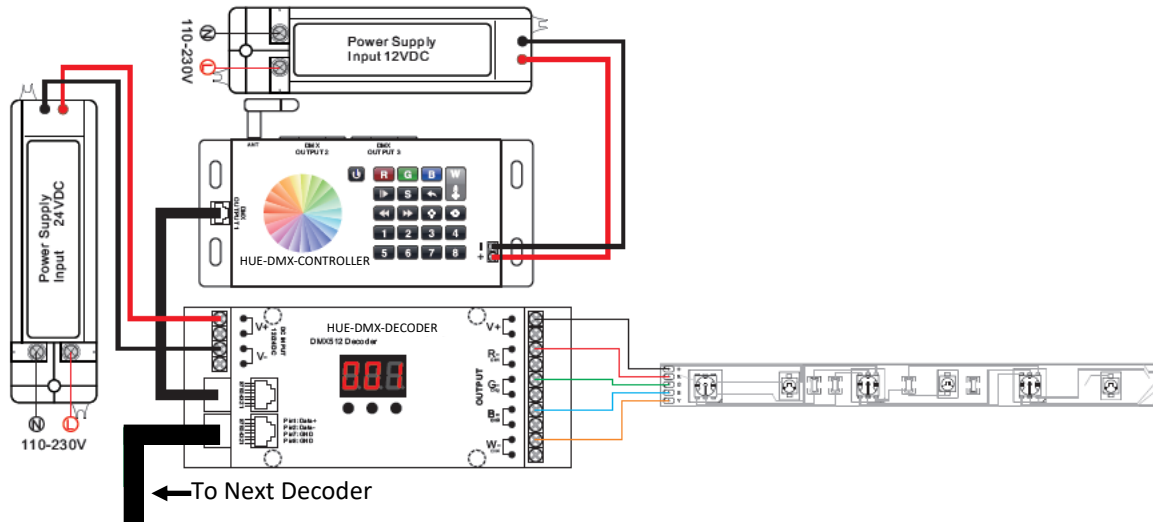

## Setting Zones to Control on the HUE-DMX-DECODER (8 Zone Maximum)

- Hold the button below the address number you desire to change for approximately five seconds  
**Number will begin to flash**
- While the number is flashing, press the button to cycle through 0-9
- Once the desired number is reached, do not press any buttons on the HUE-DMX-DECODER for approximately five seconds

**Number will stop flashing**

**SET HUE-DMX-DECODER ZONES ACCORDING TO TABLE BELOW**

Zone	Address
1	001
2	005
3	009
4	013
5	017
6	021
7	025
8	029




## Pairing HUE-RF/DMX-REMOTE

- Turn on the HUE-RF/DMX-REMOTE

**The red indicator light on the top right of HUE-RF/DMX-REMOTE will come on**

- Press the learn button on the HUE-DMX-CONTROLLER

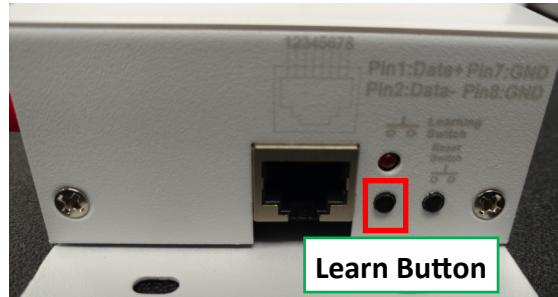

- Select a zone on the HUE-RF/DMX-REMOTE that has HUE-DMX-DECODER(s) addressed to it
- Touch any button on the HUE-RF/DMX-REMOTE so LEDs change to ensure that the pairing was successful

**For in-depth HUE-RF/DMX-REMOTE instructions please refer to the HUE-RF/DMX User Guide**

---

## Integrating HUE-DMX-CONTROLLER into Home Network

- Download the Easycolor app



iOS Name: Easycolor Pro

Android Name: EasyLighting EasyLife

- Go to your device's wifi settings and connect to the Easycolor network

**Password is: 0123456789**

- Open the Easycolor app and go to the settings tab
- Enter the following information

SSID:

IP:

Name:




# Operating Instructions



## Controlling Zone(s)

- Select a zone number (1-8) to control a single zone independently or multiple zone numbers to control zones together

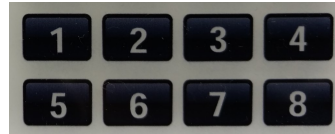

## Turn Colors On/Off

- Touch the R, G, B, or W buttons to switch the corresponding color on or off

**If you press R then G, these colors will be mixed. To get just one color, make sure to turn other color(s) off**






## Choosing a Custom Color





- Touching the color wheel at any time will take over and allow you to select custom colors



## Dimming

- To dim R, G, B or increase brightness, use the  or  button respectively
- Long press the  to dim the white or increase its brightness

## Color Modes

- The  button will play or pause one of the ten preset modes
- The  button will speed up a mode
- The  button will slow down a mode
- The  button will return to a previous color or mode





# Operating Instructions

## Continued



### Saving Colors and/or Modes

- Each zone can save eight colors or modes using the  button. To do so:


1. Choose a zone number(s) 1-8
2. Turn on the mode or color that you would like to save
3. Hold the  button approximately five seconds

**A blue indicator light above the color wheel will flash**

4. Select a zone number 1-8 to save the selection to

**The ribbon will flash white and then return to saved color to indicate the save was successful**

### Recalling Saved Colors and/or Modes

1. Choose a zone number(s) 1-8
2. Press the  button
3. Press the zone number 1-8 to select desired saved scene